

XtremeScale™ X2522 Family

The World's Lowest Latency 10/25G Ethernet NIC The Industry's 1st Standard NIC with Hardware Security

The X2522 dual-port 10/25G Ethernet NIC is a member of the X2 family of XtremeScale products that redefine the price/performance of standard NICs for modern data centers.

Designed from the ground up for virtualized dense server environments, Solarflare XtremeScale X2 adapters are the most cost-effective NICs in the industry for Ethernet connectivity. At the same time, XtremeScale acceleration provides record-breaking low latency and throughput needed for today's modern class of applications. X2 is the most secure standard NIC with integrated hardware firewalls. XtremeScale X2 is the only general-purpose NIC with 2,048 Virtual NICs, programmable packet processing engine for network off-load and real-time packet/flow capture required by your network performance management and analytics platforms.

Summary of Features and Benefits

Acceleration Services Allow Distributed Apps to Scale-Out – The challenge with distributed apps is keeping hardware and system latency low while scaling to thousands of tasks running across thousands of cores. The X2522 harnesses kernel bypass acceleration to deliver superior small packet performance with hardware latency as low as one-half a microsecond. Solarflare kernel bypass technologies include Onload™, ScaleOut Onload and DPDK acceleration services and provide servers the headroom needed to handle more processes in the same amount of time and with fewer servers.

Solarflare acceleration technology can also be used to build ultra-low latency NVMe all-flash storage fabrics. X2522 NICs configured for NVMe over standard TCP provide similar performance to NVMe fabrics based on special-purpose RDMA fabrics without the need for dedicated, specialized network infrastructure.


Precision Time Stamping for Accurate Synchronization – The X2522 supports the precision time protocol (PTP) fabric service for apps that require synchronized time stamping of packets down to single-digit nanosecond resolution.

Protect Traffic “Inside” the Data Center by Deploying the Industry’s 1st Standard NICs with HW Security On-Board – ServerLock™ technology inside every X2522 NIC complements firewall perimeter security. It is now possible to scale security inside your data center by using micro-segmentation to scale packet surveillance, filtering, cloaking and firewalling with every server.

Real-Time Telemetry Feeds Security & Analytics – The X2522 provides real-time monitoring, inspection, and capture of packets needed for network performance management, security analytics, and compliance. Packet data can be forwarded to a libpcap API or saved to a file with hardware timestamps.

A Platform for Micro-Segmented NIC Fabric Services – For modern data centers, X2522 lays a new foundation for NIC-based network virtualization needed for their highly distributed applications with thousands of inter-connected web server, machine learning, and big data workloads. X2522 is the first and only standard NIC platform that can establish ultra-scale connectivity to thousands of virtual NICs, while at the same time providing real-time packet and flow information. The combination of ultra-high bandwidth, ultra-low latency, ultra-scale connectivity and packet telemetry, allows X2522 NICs to serve as the industry’s first commercial platform for micro-segmented NIC fabric services that scale with each server, VM or container.

The Most Cost Effective NICs in the Industry – Solarflare makes data center-wide deployment of these capabilities cost-effective. Although X2522 NICs provide superior performance and the SmartNIC-like ability to enable network services, a 10/25GbE X2 NIC from Solarflare offers a cost advantage over comparably configured NICs from other industry players Broadcom, Intel, and Mellanox.

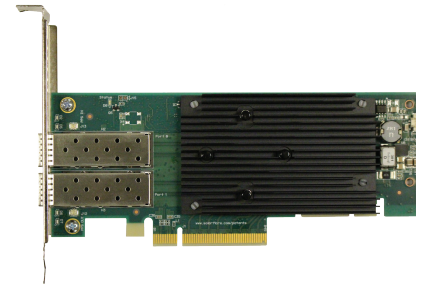

The Solarflare Advantage

- **Lower Cost** – We invite you to compare. The X2522 is flat-out the most cost-effective 10/25G NIC.
- **Scale Higher** – The only standard 10/25G NIC with half-microsecond hardware latency, and the ability to segment a single NIC into thousands of vNICs or 8x more than competitive NICs.

Together, ultra-low latency and ultra-scale connectivity power a more efficient data center that scales higher with more workloads per server and/or fewer servers.

See how the X2522 accelerates database caching and software load balancing by up to 400%.

- **Secure Every Server** – The first and only solution allowing IT organizations to deploy a layer of security on every server using a general-purpose NIC.
- **Network Visibility** – Only standard NICs from Solarflare provide valuable real-time packet and flow data for you to monitor, capture and analyze.

Specifications

Acceleration

- Universal Kernel Bypass
 - DPDK Poll Mode Driver - Packet (Cloud, Telco)
 - ScaleOut Onload - TCP (Cloud, Telco, Enterprise)
 - Onload* - TCP/UDP
 - TCP Direct* - TCP/UDP
- MSI-X Support
- 2x10/25G 64-byte line rate
- Interrupt Coalescing

Security

- ServerLock™ Local Hardware Filtering - Monitor, report, analyze, filter and enforce policies
- Tamper resistant adapter – Digitally signed firmware and secured private keys

Time Synchronization and Hardware Timestamping*

- On-board Stratum 3 compliant oscillator
- Solarflare Software PTP Daemon delivers enhanced stability and clock synchronization accuracy and can be used to synchronize the adapter clock to external time source.

Stateless Offloads

- TCP/UDP Checksum Offload (CSO)
- TCP Segmentation Offload (TSO)
- Generic Segmentation Offload (GSO)
- Large Send Offload (LSO)
- Large Receive Offload (LRO)
- Receive Side Scaling (RSS)
- Receive Segment Coalescing (RSC)

Manageability and Remote Boot

- PXE and UEFI
- Solarflare Secure Boot
- Tamper resistant Secure Firmware Upgrade
- NC-SI over MCTP SMBus
- PLDM over MCTP SMBus
- MCTP PCIe VDM

Management and Utilities

- Ethtool Support
- vCenter Plug-in
- Solarflare Boot Manager

Adapter Hardware

- PCIe Gen 3.1 x8
- 25G SFP28 or 10G SFP+ direct attach copper or optical transceiver; SFP28 cages

Hardware Certifications

- FCC, UL, CE
- RoHS - Complies with EU directive 2011/65/EU

Traffic Engineering

- XtremePacket™ Engine for dedicated parsing, filtering, and flow steering
- TCP/UDP/IP, MAC, VLAN, RSS filtering, Accelerated Receive Flow Steering (ARFS), Transmit Packet Steering

Storage

- NVMeoF-TCP Plug-in for low latency, high performance storage networking on standard Ethernet fabric

Virtualization

- Linux Multi-queue
- VMware NetQueue
- Microsoft Hyper-V Virtual Machine Queue (VMQ)
- SR-IOV: 16 physical functions, 240 virtual functions;
- 2048 Guest OS protected vNICs
- Full hardware switch fabric in silicon capable of steering any flow based on Layer 2 to Layer 4 protocols, between physical and virtual interfaces.
- VXLAN, NVGRE, and GENEVE tunneling offloads; adaptable to custom overlays
- VLAN and VLAN Q-in-Q Insertion/Stripping

Ethernet Standards

- IEEE 802.3-2012 Ethernet Base Standard, including 802.3bx
- IEEE 802.3-2015 Ethernet Flow Control
- IEEE 802.3ad, 802.1AX Link Aggregation
- IEEE 802.1Q, 802.1P VLAN Tags and Priority
- IEEE 1588-2008 PTPv2
- Jumbo Frame support (9000 bytes)

OS Support

- Red Hat RHEL, SUSE SLES, Debian, Ubuntu
- Windows Server
- VMware ESXi
- For complete list of supported OS versions visit: <http://support.solarflare.com>

Physical Dimensions

- L: 16.75 cm (6.6 in)
- W: 6.9 cm (2.7 in)
- End bracket height: PCI Express standard, 12.0 cm (4.725 in)
- PCI Express low-profile: 7.92 cm (3.12 in)

Environmental Requirements

- Temperature:
 - Operating: 0°C to 55°C (32°F to 131°F)
 - Storage: -40°C to 65°C (-40°F to 149°F)
- Humidity:
 - Operating: 10% to 80%
 - Storage: 5% to 90%

Ordering Information

X2522	10G link speed support, * features can be acquired through a separate license
X2522-PLUS	10G link speed support, includes all * features
X2522-25G	10/25G link speed support, * features can be acquired through a separate license
X2522-25G-PLUS	10/25G link speed support, includes all * features

SF-119854-CD Issue 6
X2522 Product Brief 071918

Note: Feature availability is dependent on software release support. Please contact Solarflare support for details.